

HSK-E

油壓刀把 HYDRAULIC CHUCK



Balancing / 動平衡


G6.3

Max.30,000 RPM
Or $U \leq 1\text{mm}$

Option / 選配
G2.5

Max.30,000 RPM
Or $U \leq 1\text{mm}$

Dimensions / 尺寸標示

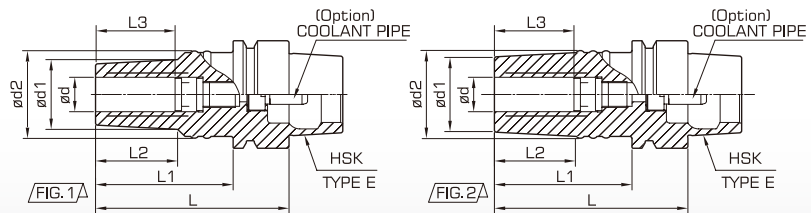

page.144

page.118



Order No.
訂購編號

FIG

ød

ød1

ød2

L

L1

L2

Tool Clamping
Depth L3
刀具夾持深度

Screw
調整螺絲

Collet
筒夾

HSK40E	HY06-070	1	6	26	33.8	70	50	24.5	31~36	HY06-M5	-
	HY08-070	1	8	28	33.8	70	50	25.5	31~36	HY08-M6	-
	HY10-080	1	10	30	33.8	80	60	35.5	35~40	HY08-M6	-
	HY12-080	1	12	32	33.8	80	60	40	39~45	HY08-M6	HY12C
HSK50E	HY06-080	1	6	26	40	80	54	24.5	31~36	HY06-M5	-
	HY08-080	1	8	28	40	80	54	25.5	31~36	HY08-M6	-
	HY10-080	1	10	30	40	80	54	35.5	35~40	HY08-M6	-
	HY12-090	1	12	32	40	90	64	40	39~45	HY08-M6	HY12C
	HY14-090	1	14	34	40	90	64	40	39~45	HY14-M8	-
	HY16-090	1	16	38	40	90	64	40	42~48	HY14-M8	-
	HY18-090	2	18	34	42	90	64	40	42~48	HY18-M12	-
HY20-090	2	20	37	42	90	64	11	44~50	HY18-M12	HY20/HY20C	

Remarks / 備註

- 直接夾持精度 Direct Clamping
- 刀具柄徑公差 h6(h6 Tooling Diameter Tolerance)
- 若需搭配中心出水管，請參考 page.145 規格表
- 若需出水型刀把，請參考 page.26 選用說明

Applications / 應用



Drilling
鑽孔



Reaming
銜孔



Endmilling
銑削