

HER 筒夾刀把 HER COLLET CHUCK



Balancing / 動平衡


Dimensions / 尺寸標示

G6.3

Max.30,000 RPM
Or U ≤ 1gmm

Option / 選配
G2.5

Max.30,000 RPM
Or U ≤ 1gmm

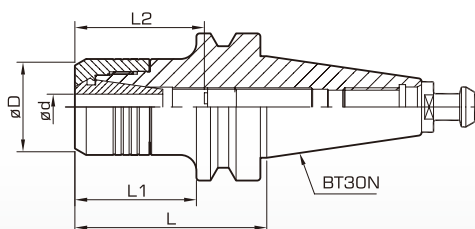

BTN BTN HOLDER WITHOUT KEYWAY

Order No. 訂購編號	Range 夾持範圍	øD	L	L1	Tool Clamping Depth L2 刀具夾持深度	page.146	page.144	page.120	page.149	
						Nut 螺帽	Screw 調整螺絲	Collet 筒夾	Wrench 扳手	
BT30N	HER16-060	1.0~10.0	30	60	38	29~58	CAP-HER16	ER-M11	ER16-HP	PHS-20-RO300
	HER20-060	1.0~13.0	32	60	38	32~65	CAP-HER20	ER-M14	ER20-HP	PHS-20-RO320
	HER25-060	1.0~16.0	40	60	38	35~58	CAP-HER25	ER-M18	ER25-HP	PHS-20-RO400

Remarks / 備註

- 需配合 3μ HP 筒夾 With 3μ HP Grade Collet
- 若需出水型刀把，請參考 page.26 選用說明
- 筒夾夾持為一對一整數值

Applications / 應用



Drilling
鑽孔



Reaming
銜孔



Endmilling
銑削



Tapping
攻牙